

HIGH Power Fiber Technology

1 μ m Pulsed Fiber Laser

Features:

- Up to 0.25 mJ
- Below 50 ns pulse width
- Optical power feedback detection
- Including back reflection output isolator
- Highly reliable laser diode pumps
- Excellent beam quality ($M^2 < 1.5$)
- Maintenance free operation
- RS 232
- Compact & rugged design
- Safety Interlock



Applications:

- Marking
- Cutting
- Drilling
- Welding
- Scribing
- Ablating
- Soldering
- Trimming
- Engraving

The ML5-PL-R-OEM Module is a compact Pulsed Ytterbium Fibre Laser delivering up to 5W of average output power, through a near diffraction limited beam ($M^2 < 1.5$). It allows to obtain more than 5 kW of peak power due to a pulse duration lower than 50 ns. Pulse repetition rate or output power can be controlled by RS232. The excellent beam quality and power stability make the Manlight Fibre Laser a multi-purpose tool. Our patented "Injection Technology" allows the use of highly reliable broad area laser diode pumps, for a cost-effective and maintenance-free operation. The all-fibre design guarantees the robustness of the laser, without any optical parts to align or to stabilise. The simple integration of the system requires no after-installation service. The ML5-PL-R-OEM is the ideal solution for a broad range of industrial applications.

ML5-PL-R-OEM

HIGH Power Fiber Technology

ML5-PL-R-OEM

Options:

- Beam expander
- Variety of fibre lengths
- Red pilot beam for tracking
- Customised specs on request
- Extended warranty
- 12 V power supply
- Rack 19" version



Operating and safety considerations
Manlight Fibre Amplifiers comply with CE, FDA & RoHS. All Manlight Fibre Lasers are patent pending.

The Manlight Fibre Amplifiers emit both invisible Class IV and visible Class II radiations. Direct and scattered radiation can be harmful to the human eye. Proper laser safety eyewear must be worn during operation. Information in this document is subject to change without notice.



Parameter	Value	Unit
Operation mode	Pulsed	-
Nominal average output power	5	W
Energy per pulse (at 20 kHz)	0.25	mJ
Pulse duration	<50	nsec
Pulse peak power (at 20 kHz)	>5	kW
Pulse repetition rate	20 to 100	kHz
Output power tunability	10 – 100	%
Output power stability (RMS, over 1h@20°C)	<+/- 2	%
External TTL modulation frequency	Up to 5.0	kHz
Laser wavelength	1064	nm
Emission bandwidth (FWHM)	< 3	nm
Polarization	Random	-
Laser output configuration	Gaussian profile	-
Output fibre length	3	m
Typical beam diameter @1/e ²	0.5	mm
Beam quality M ²	<1.5	-
Dimensions	178 x 230 x 65	mm ³
Weight	< 3	Kg
Storage / Operation Temperature	- 20 to + 60 / + 15 to + 45	°C
Control interface includes RS232	RS 232	-
Operating voltage DC	12	V
Typical power consumption (5W @ 25°C)	< 50	W

Mechanical drawings:

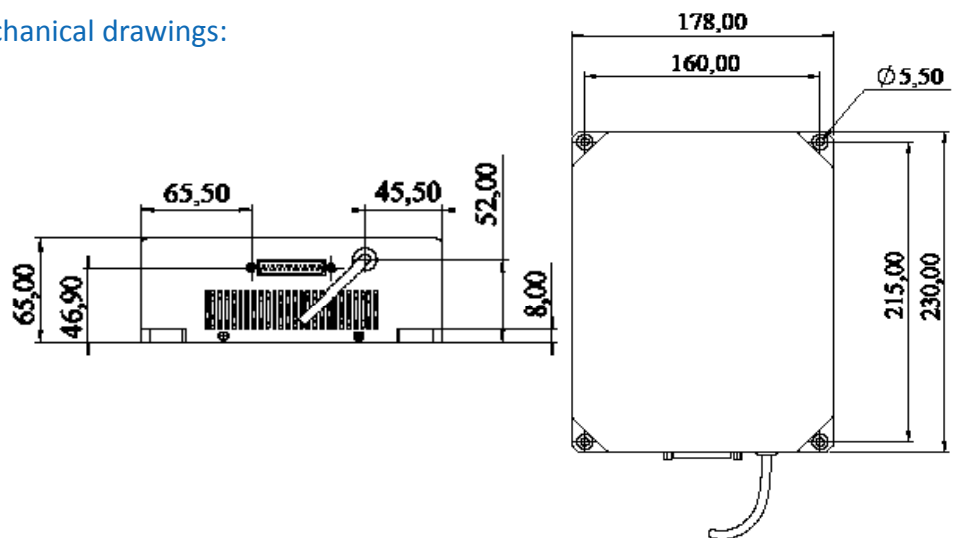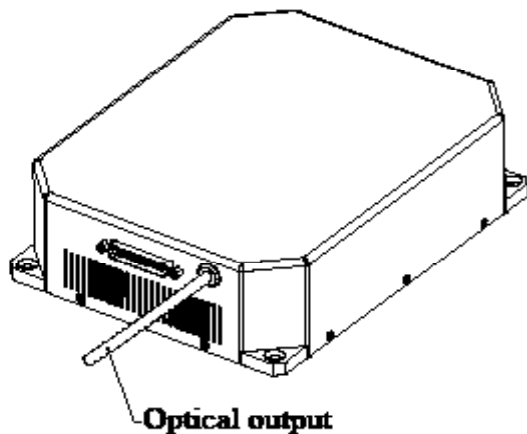

Ordering Information: ML5-PL-R-OEM
Product Code: 110