

UV-Water Probe with 0-5V Output UVC Photodiode (SiC)

UV_Water_C_AMP0-5V_cable



Our probes of the UV-Water series are characterized by their 10bar water pressure resistance. They are well suited for measurements under water. The ¼" thread allows comfortable mounting at the measuring point.

Features of Typs UV_Water_C_AMP0-5V_cable:

- **Only for UVC measurement, e.g. for purification control, spectral sensitivity according to DVGW W294-3**
- **Filtered, silicon carbide based UV photodiode for extreme radiation hardness**
- **Integrated amplifier with 0..5V voltage output**
- **Offset and amplification factor are adjustable**
- **Stainless steel housing with 10bar water pressure resistance**
- **With ¼"-thread for comfortable mounting**
- **2m shielded cable**

Probes from the **UV-Water** series are available with the following details:

Sensor type	Part Number
With broadband photodiode	UV_Water_ABC_Design
With UVC photodiode DVGW W 294-3	UV_Water_C_Design
With Erythema Sensor DIN 5050 ISO 17166/CIE S 007/E	UV_Water_UV-Index_Design

Design	Part Number
With 4-20mA output and 2m cable	UV_Water_Sensortype_AMP4-20mA_cable
With 4-20mA output and 5 pin connector	UV_Water_Sensortype_AMP4-20mA_plug
With 0-5V output and 2m cable	UV_Water_Sensortype_AMP0-5V_cable
With 0-5V output and 5 pin connector	UV_Water_Sensortype_AMP0-5V_plug
Without amplifier and with 2m cable	UV_Water_Sensortype_cable
Without amplifier and with 5 pin connector	UV_Water_Sensortype_plug

Please consider the following probe series:

- UV-Air (compact stainless steel probe)
- UV-Cosine (with cosine correction and wide angle characteristics)
- UV-DVGW (probe according to DVGW W 294-3(2006))

For Prices, delivery and to place an order, please contact Scitec Instruments Ltd at
Scitec Instruments Ltd, Bartles Industrial Estate, North Street, Redruth, Cornwall, England TR15 1HR
Tel: +44(0)1209 314 608, Fax +44(0)1209 314609
or visit our website www.scitec.uk.com


UV-Water Probe with 0-5V Output UVC Photodiode (SiC)

UV_Water_C_AMP0-5V_cable


Technical Data ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power supply	V_B	+7...24	V
Output signal	V_{OUT}	0...5	V
Power consumption	I_{max}	<30	mA
Linearity	L	2	%
Temperature drift	ΔT	0,03	W/m ² /K
Wavelength of max. Sensitivity	λ_{Smax}	270	nm
Sensitivity range ($S=0.1*S_{max}$)	–	230-285	nm

Spectral Sensitivity (Photodiode SG01S-C18)

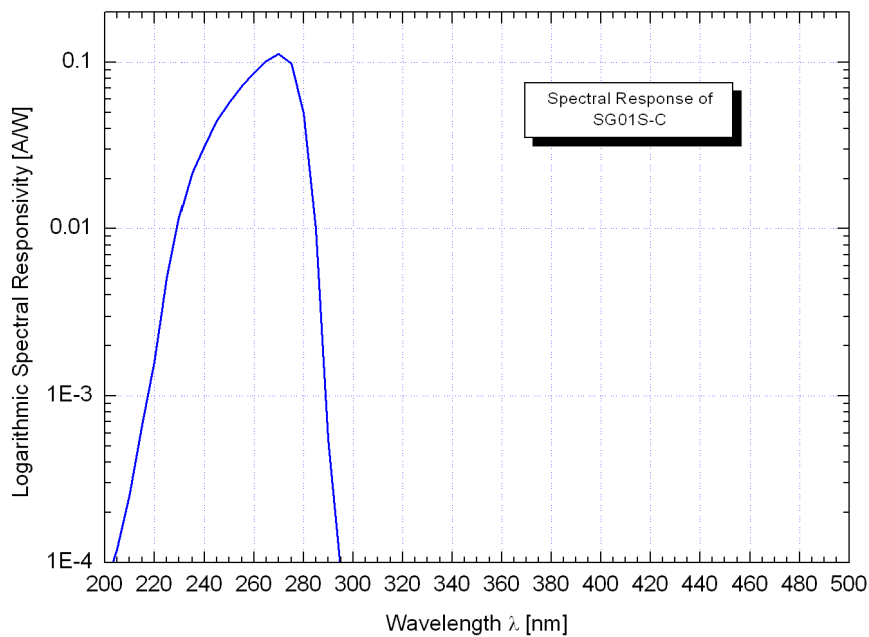

Dimensions

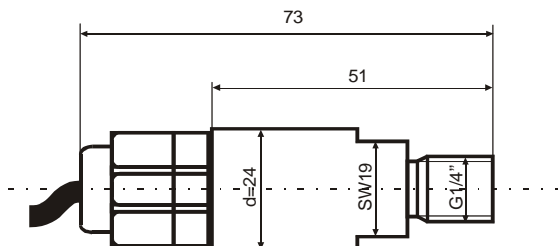

Configuration:

Brown: V_0
 White: V_+
 Green: Signal

For Prices, delivery and to place an order, please contact Scitec Instruments Ltd at
 Scitec Instruments Ltd, Bartles Industrial Estate, North Street, Redruth, Cornwall, England TR15 1HR
 Tel: +44(0)1209 314 608, Fax +44(0)1209 314609
 or visit our website www.scitec.uk.com